

Installation Instructions

Eibach Springs, Inc. • 264 Mariah Circle • Corona, California 92879-1751 • USA • Tech Support 800-222-8811 Ext 114

END LINK KIT # AK41-40-036-04-FA

Kit Contents	Description	Part Number	Qty
	End Link	UEL26030202	2
	Instructions	AK41-40-036-04-FAINST	1

NOTES: Read All Instructions Before Beginning Installation

- Only qualified mechanics experienced in the installation and removal of suspension components should perform this installation.
- Use of a hoist and screw jack is highly recommended and will substantially reduce installation time.
- Never work on or under a vehicle unless it is properly supported.

Installation of Eibach Adjustable front end links.

1. Begin by raising the vehicle and supporting it with the proper safety equipment, then, remove the front wheels. **Note: Never work on or under a vehicle that is not supported by the proper safety equipment.**



Photo 1



Photo 2

2. Loosen and remove the OE hardware that secures the OE end links to the ends of the anti roll bar and the struts, then, remove the end links. (See Photos 1 & 2)

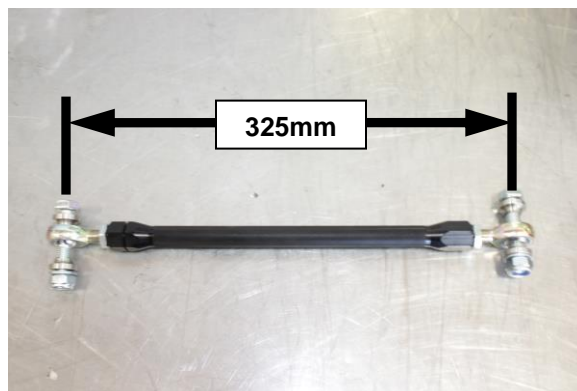


Photo 3

3. Adjust the Eibach end links to 325mm from center to center as shown. (See Photo 3)



Photo 4



Photo 5



Photo 6

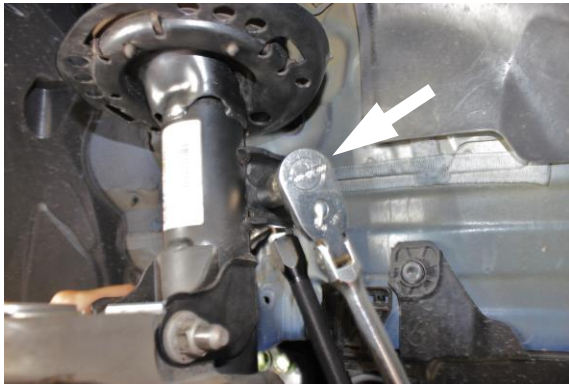


Photo 7

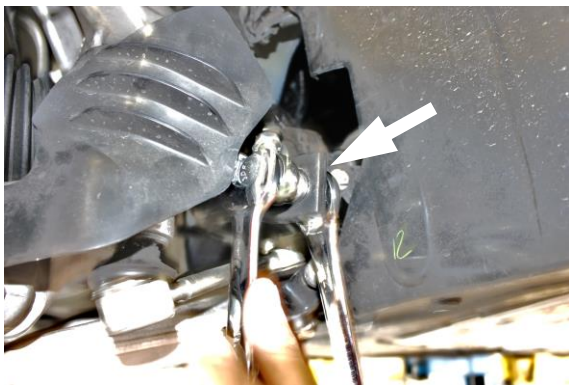


Photo 8

4. Install the links as shown and secure to the bar with the provided hardware. **(See Photos 4, 5, 6, 7 & 8)**

5. With the hardware properly secured, tighten the jam nuts.
6. Double check to make sure everything is properly positioned and tightened, then, road test the vehicle.
7. After road testing, double check all hardware to make sure everything is properly tightened and re-tighten if necessary.