

Installation Instructions

Eibach Springs, Inc. • 264 Mariah Circle • Corona, California 92879-1751 • USA • Tech Support 800-222-8811 Ext 114

Anti-Roll-Kit # 4054.312 Acura, RSX, Incl. Type S, 2002-2003

Kit Contents	Description	Part Number	Qty
	Rear Bar	4054.320R	1
	Anti-Roll Hardware Kit	4054.312HK	1
	Instructions	4054.312INST	1

NOTES: Read All Instructions Before Beginning Installation


- Only qualified mechanics experienced in the installation and removal of suspension components should perform this installation.
- Use of a hoist and screw jack is highly recommended and will substantially reduce installation time.
- Installation time: Is approximate 1.5 hours with the use of a hoist.
- Never work on or under a vehicle unless it is properly supported by safety stands.
- Tire Rotation: In order to increase the life of your tires, it is recommended to rotate your tires every 3,000 miles.

Additional Eibach Components Available For Your Car

Eibach Kits	Part Number	Description	Front	Rear
<i>Pro-Kit</i>	4054.140	High Performance Handling	1.0 In.	1.4 In.
<i>Sportline</i>	4.5440	Extreme Performance	1.7 In.	2.0 In.
<i>Alignment Kit</i>	5.67230K			+/- 3.00 °


FACTORY REAR BAR REMOVAL

1. Remove the two end link nuts with a 14mm socket. (See Illustration 7)

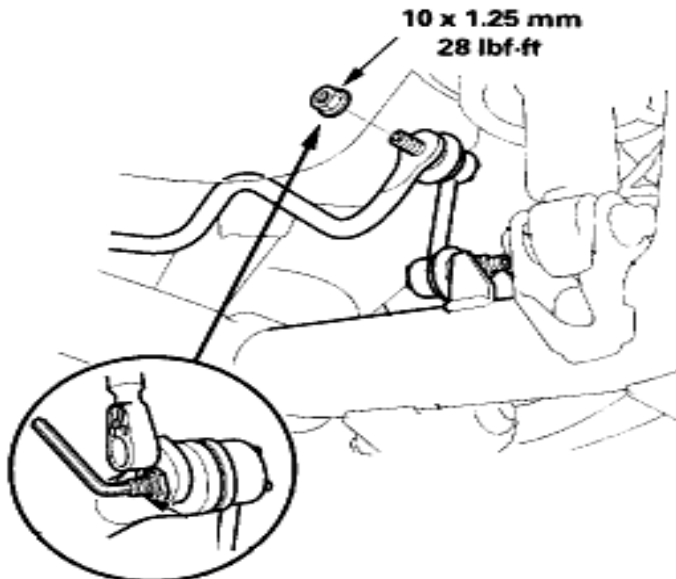

(Illustration 7) Rear factory end link

2. Remove the Anti-Roll-Bar frame mount bracket with a 12mm socket. (See Illustration 8)

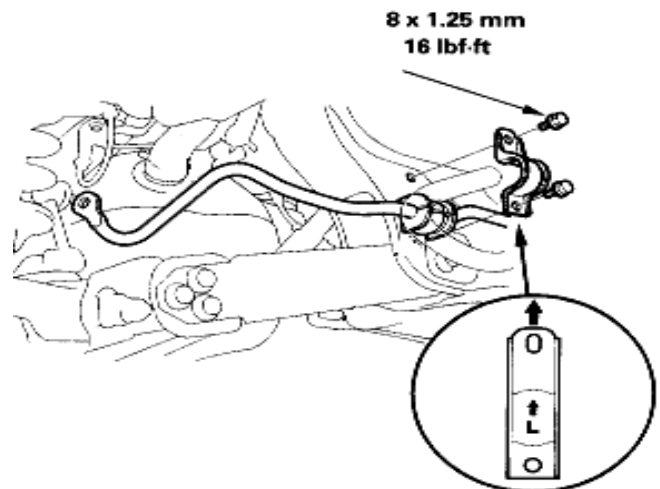

(Illustration 8) Factory rear frame mount bracket

3. Remove the bar.



***EIBACH* REAR BAR INSTALLATION**

1. Apply the supplied lubricant to the inside of the new bushings.
2. The ***Eibach*** rear bar can be installed in the reverse order.
3. Make sure that you install the new bushing on the ***Eibach*** bar with the "cut" portion towards the rear of the vehicle.