

Installation Instructions

Eibach Springs, Inc. • 264 Mariah Circle • Corona, California 92879-1751 • USA • Tech Support 800-222-8811 Ext 114



Anti-Roll-Kit # 7717.312

2008-2009 Subaru WRX 4 & 5 door, incl STi

Kit Contents	Description	Part Number	Qty
	Rear Bar	7717.320R	1
	Anti-Roll Hardware Kit	7717.312HK	1
	Bushing, Rear	UB0193	2
	Information Kit	EPAK	1
	Instructions	7717.312INST	1

NOTES: Read All Instructions Before Beginning Installation

- **Only qualified mechanics experienced in the installation and removal of suspension components should perform this installation.**
- **Use** of a hoist and screw jack is highly recommended and will substantially reduce installation time.
- **Installation time:** Is approximate **1/2** hour with the use of a hoist.
- **Never work on or under a vehicle unless it is properly supported.**
- **Tire Rotation:** In order to increase the life of your tires, it is recommended to rotate your tires every 3,000 miles.

FACTORY REAR BAR REMOVAL

1. Raise the vehicle up and make sure it is properly supported with safety stands. **Note: Never work under a vehicle that is not properly supported with the appropriate safety stands.**



Photo 1

2. Remove the nut that secures the end link to both ends of the OE bar. **(See photo 1)**



Photo 2

3. Remove the OE bushings brackets, then, remove the bar from the vehicle. **(See Photo 2) Note: The OE bushing brackets will be reused for the installation of the Eibach rear bar.**

EIBACH REAR BAR INSTALLATION



Photo 3

4. Apply some of the provided lube to the inside of the supplied bushings, then, install the new bushings onto the Eibach bar. (See Photo 3)

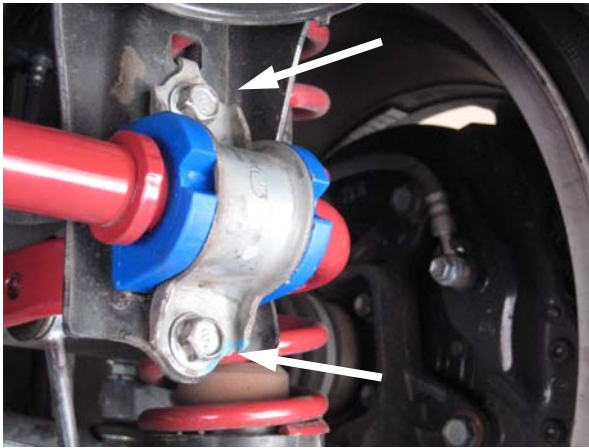


Photo 4

5. Install the Eibach bar into the vehicle and secure it with the OE bushing brackets and hardware. (See Photo 4)



Photo 5

6. Secure the OE end links to the ends of the bar using the OE hex nuts. (See Photo 5)



7. Make sure everything is tightened and properly positioned.

Tuning Rear Bar.

- a) Softest setting.
 - Reduces over-steer
 - Use in rain or on slick roads.
 - Use on rough or bumpy tracks.
 - Increases comfort.
- b) Firmest setting.
 - Reduces under-steer
 - Use on dry roads and tracks.
 - Use on smooth roads and tracks.
 - Do not use on wet or slick roads.

