

# Installation Instructions

Eibach Inc. 264 Mariah Circle Corona, CA 92879  
USA Tech Support 800-507-2338 ext. 114



## E80-82-096-01-22

2022+ Toyota Tundra

### Notes

Ensure the snap ring, spring perch adapter, top hat adapter, and bump stop spacer are installed and seated properly or else damage to the vehicle may occur.

Vehicles equipped with factory Bilstein shocks will not need the perch adapter included on the shocks

The OE top hat nut will be reused on your Eibach shocks

### Kit Contents

| Description        | Part Number      | Quantity |
|--------------------|------------------|----------|
| Front Spring       | F31-82-096-01-FA | 2        |
| Rear Spring        | F31-82-096-01-RA | 2        |
| Front Damper       | 82128.8003       | 2        |
| Rear Damper        | 82128.8004       | 2        |
| Bump Stop Spacer   | UB0097           | 2        |
| Dust Boot          | 84-2015          | 2        |
| Nylon Cable Tie    | H70065500        | 2        |
| Retaining Ring Kit | 84-1804.0        | 2        |

### Shock Instructions and Safety Tips

#### Read all instructions before beginning installation

- Any time you are working under a vehicle, be sure to use the proper jack stands and tire chocks to prevent any shifting or slipping of the car. Never use a jack only to support the vehicle while changing shocks.
- Inspect shock brackets or mounting points before installation to make sure they are not broken or bent.
- Do not attempt to disassemble these shocks. Return damaged shocks to EIBACH SPRINGS for any necessary service or repairs.

# Installation Instructions

Eibach Inc. 264 Mariah Circle Corona, CA 92879  
USA Tech Support 800-507-2338 ext. 114



## Shock Instructions and Safety Tips

### IMPORTANT NOTES:

- Any time you are working under a vehicle, be sure to use the proper jack stands and tire chocks to prevent any shifting or slipping of the car. Never use a jack only to support the vehicle while changing shocks.
- Inspect shock brackets or mounting points before installation to make sure they are not broken or bent.
- Do not attempt to disassemble these shocks. Return damaged shocks to Eibach for any necessary service or repairs.

### USE THE RIGHT SHOCK FOR YOUR VEHICLE

- Use EIBACH shocks only for the applications for which they are listed. Each shock is specifically tuned for that vehicle's weight, suspension geometry, and other characteristics.
- Compare original shock mounting style and hardware with your new shocks before starting installation. If original hardware is not reusable, it should be replaced with OEM quality and style hardware.
- Shocks are tuned to vehicle manufacturer's recommendation for tire pressure, not necessarily the max inflation pressure listed on sidewall of tire.
- The OEM spring perch will have to be removed from the OEM strut assembly and installed onto the Eibach Pro Truck Sport Damper.

### ADDITIONAL NOTES

- If you are uncertain of proper shock installation procedure, please consult appropriate service manual. Torque all fasteners to vehicle manufacturer's specs. Note: On Post Mount shocks, finger tighten nut to achieve zero clearance between the retaining washers and the bushings, then continue to tighten approximately 5-6 turns to achieve proper pre-load. Bushings should be slightly bulged. Secure with Jam Nut. On some vehicles, nut may bottom out on stud before 5-6 turns, which is proper for those applications.
- OEM mounting hardware may be either standard or metric. Make sure you have the proper tools before starting. Do not interchange hardware. Use new mounting hardware provided with your shocks, and re-use original mounting hardware in all other locations.
- Eibach shocks have a high-pressure nitrogen gas charge and may come with a restraining strap, which holds the shock in a compressed position. To ease most installations, leave the strap on until you have secured one end of the shock, then cut the strap and quickly guide the other end of the shock into position as it expands. Strap must be cut before some installations, such as when strap goes around post.
- Wire ties are provided to secure the shock boot to the shock body. On some installations (especially where the shock must pass through a hole in the lower control arm), it is necessary to put the wire tie on after the shock is installed.
- After installing shocks and before driving vehicle, check for clearance of exhaust, brake or gas lines, electrical wiring, etc.
- After installation, drive the vehicle cautiously for the first few miles to develop a feel for the improved handling and ride quality. After 10 miles, inspect installation, re-check torque on all fasteners, and verify adequate component clearance.

# Installation Instructions

Eibach Inc. 264 Mariah Circle Corona, CA 92879  
USA Tech Support 800-507-2338 ext. 114



## Installation Notes

1. Park vehicle on level surface and set emergency brake. Raise and support the vehicle with safety stands. Refer to factory manual for proper location of safety stands
2. Power washing your chassis will make the installation cleaner. NOTE: Never work on or under a vehicle unless it is properly supported by safety stands.
3. Loosen and remove the OE shock per the factory recommended removal procedure.
4. Installation of the Eibach Pro Damper shock should be done in the reverse order of removal.

## Heights with Eibach PRO-LIFT-KIT Springs

|  | Non-Hybrid | Hybrid     |
|--|------------|------------|
|  | DO NOT USE | DO NOT USE |
|  | DO NOT USE | DO NOT USE |
|  | +3.1"      | +3.0"      |
|  | +2.6"      | +2.5"      |

- Shocks are tuned to vehicle manufacturer's recommendation for tire pressure, not necessarily the max inflation pressure listed on sidewall of tire.
- The OEM spring perch will have to be removed from the OEM strut assembly and installed onto the Eibach Pro Truck Sport Damper.
- **Bottom clip will be level with OE rear spring, or have approximately 1" of forward rake with the Eibach rear spring on non-hybrid models and 0.7" on hybrid models.**
- **2<sup>nd</sup> clip will need to be used in order to be level with Eibach rear spring.**
- **Due to factory vehicle tolerances and options, lift heights can vary.**


# Installation Instructions

Eibach Inc. 264 Mariah Circle Corona, CA 92879  
USA Tech Support 800-507-2338 ext. 114



## Perch Installation

1. Ensure that the Snap Ring is fully seated in the snap ring groove (you should be able to rotate it manually).
2. Install the spacer ring if included in the orientation shown unless vehicle was equipped with factory Bilstein shocks. Make sure the snap ring is fully seated into the groove on the bottom side of the spacer ring. **Improper installation will cause permanent damage to the shock.**

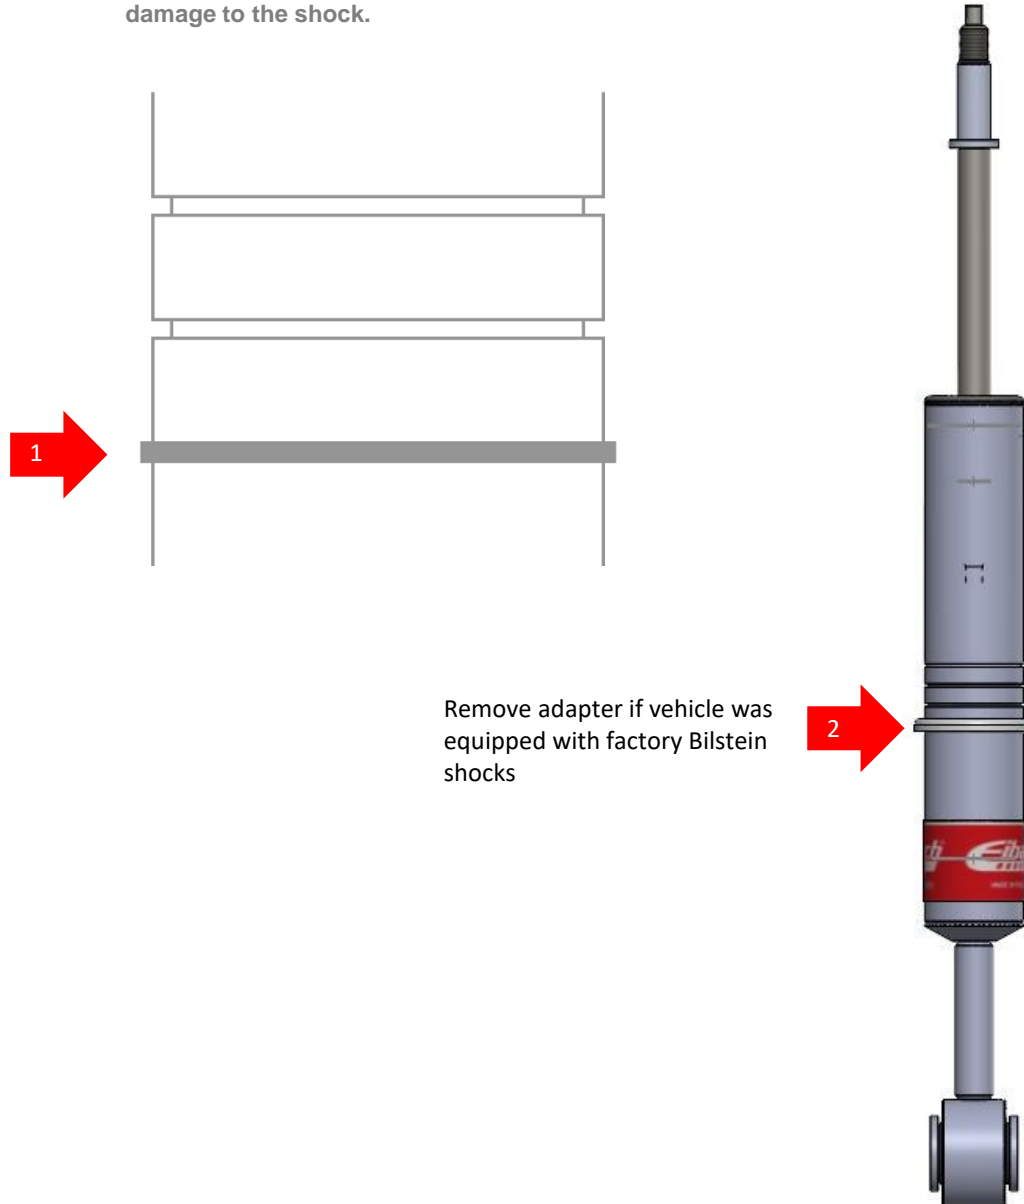

# Installation Instructions

Eibach Inc. 264 Mariah Circle Corona, CA 92879  
USA Tech Support 800-507-2338 ext. 114



Install 1 bump stop spacer per side as shown