

# Installation Instructions

Eibach Springs, Inc. • 264 Mariah Circle • Corona, California 92879-1751 • USA • Tech Support 800-222-8811 Ext 114

## END LINK KIT # AK41-212-004-01-FA

Kit Contents	Description	Part Number	Qty
	End Link	UEL00010201	2
	Instructions	AK41-212-004-01-FAINST	1

### NOTES: Read All Instructions Before Beginning Installation

- Only qualified mechanics experienced in the installation and removal of suspension components should perform this installation.
- Use of a hoist and screw jack is highly recommended and will substantially reduce installation time.
- Never work on or under a vehicle unless it is properly supported.

### Removal and installation of Eibach adjustable end links.

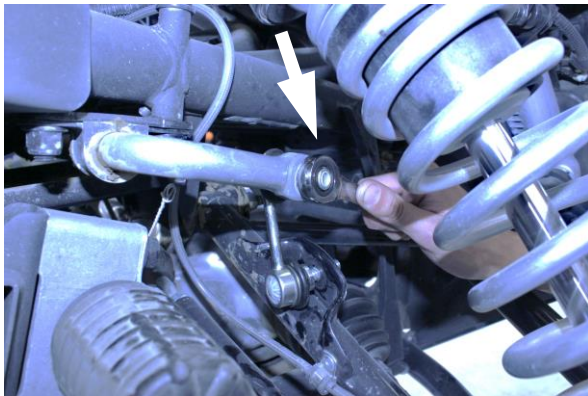


Photo 1

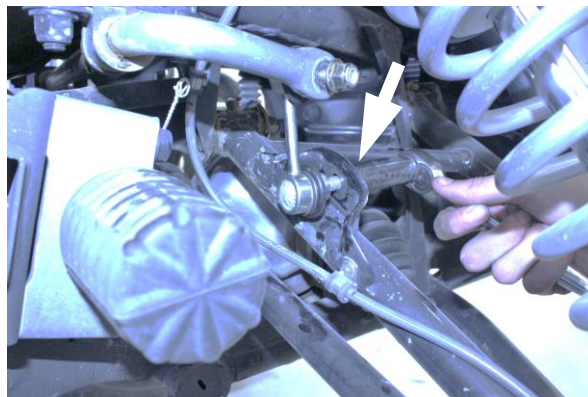


Photo 2

1. Loosen and remove the hardware that secures the end link to the ends of the OE anti roll bar and the control arm, then, remove the end links from both ends of the OE bar. (See Photos 1 & 2)

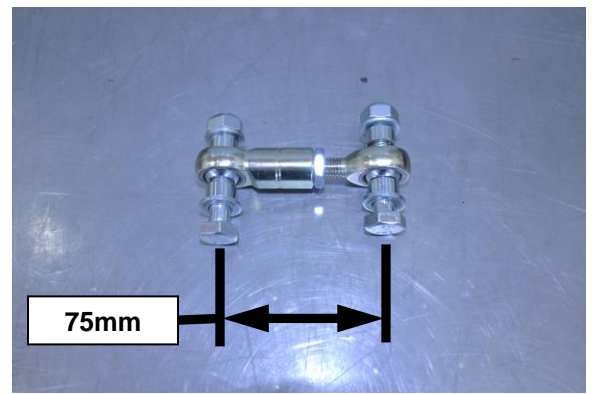


Photo 3

2. Adjust the Eibach end links to 75mm from center to center as shown. (See Photo 3)

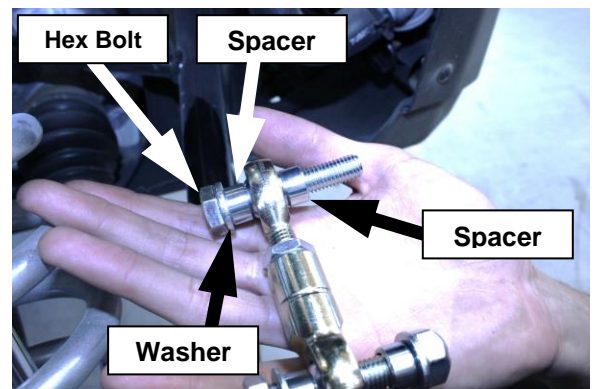


Photo 4



Photo 5



Photo 6

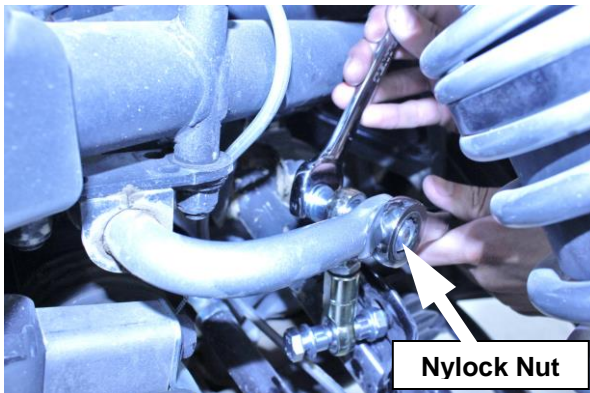


Photo 7

3. Install the links as shown and secure to the bar with the provided hardware. (See Photos 4, 5, 6 & 7)



Photo 8

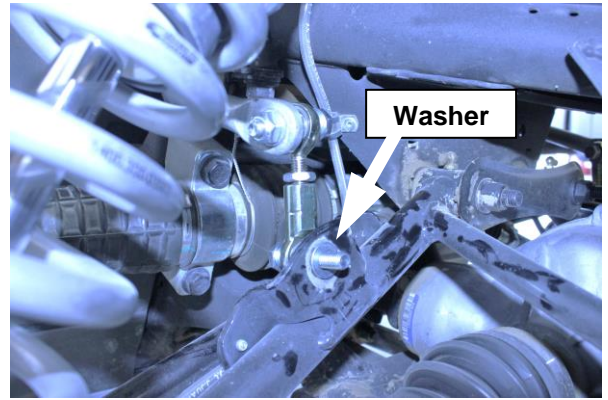


Photo 9

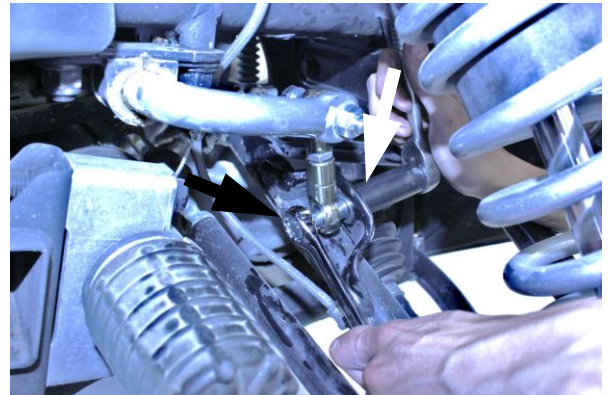


Photo 10

4. You can now secure the end link to the control arm with the provided washer and nut as shown. (See Photos 8, 9 & 10)



Photo 11

5. With the hardware properly secured, tighten the jam nut as shown. (See Photo 11)
6. Double check to make sure everything is properly positioned and tightened, then, road test the vehicle.
7. After road testing, double check all hardware to make sure everything is properly tightened and re-tighten if necessary.